



KTEB-224HO-UV-TP-PS /LS

T5HO ELECTRONIC FLUORESCENT



PRODUCT FEATURES


STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F24T5/HO	2	120	52.0	0.44	0.98	1.70	1.00	1.92	10	F2-12
		277	52.0	0.19	0.98	1.70	1.00	1.92	10	F2-12
	1	120	27.0	0.23	0.98	1.70	1.02	3.78	10	F1-11
		277	27.0	0.10	0.98	1.70	1.02	3.78	10	F1-11
FT24W/2G11	2	120	52.0	0.44	0.98	1.70	1.00	1.92	10	P2-2
		277	52.0	0.19	0.98	1.70	1.00	1.92	10	P2-2
	1	120	27.0	0.23	0.98	1.70	1.02	3.78	10	P1-2
		277	27.0	0.10	0.98	1.70	1.02	3.78	10	P1-2
FC9T5 22W	2	120	52.0	0.44	0.98	1.70	1.00	1.92	10	F2-1
		277	52.0	0.19	0.98	1.70	1.00	1.92	10	F2-1
	1	120	27.0	0.23	0.98	1.70	1.02	3.78	10	F2-1
		277	27.0	0.10	0.98	1.70	1.02	3.78	10	F2-1
FC12T5 40W	1	120	40.0	0.34	0.98	1.70	0.84	2.10	10	F2-1
		277	40.0	0.15	0.98	1.70	0.84	2.10	10	F2-1
FT40W/2G11	1	120	47.0	0.40	0.98	1.70	1.00	2.13	10	P1-2
		277	47.0	0.17	0.98	1.70	1.00	2.13	10	P1-2
FT36W/2G11	1	120	34.0	0.29	0.98	1.70	0.90	2.65	10	P1-2
		277	34.0	0.13	0.98	1.70	0.90	2.65	10	P1-2
F39T5/HO	1	120	39.0	0.33	0.99	1.70	0.90	2.31	10	F1-11
		277	39.0	0.15	0.97	1.70	0.90	2.31	10	F1-11

WIRING DIAGRAMS

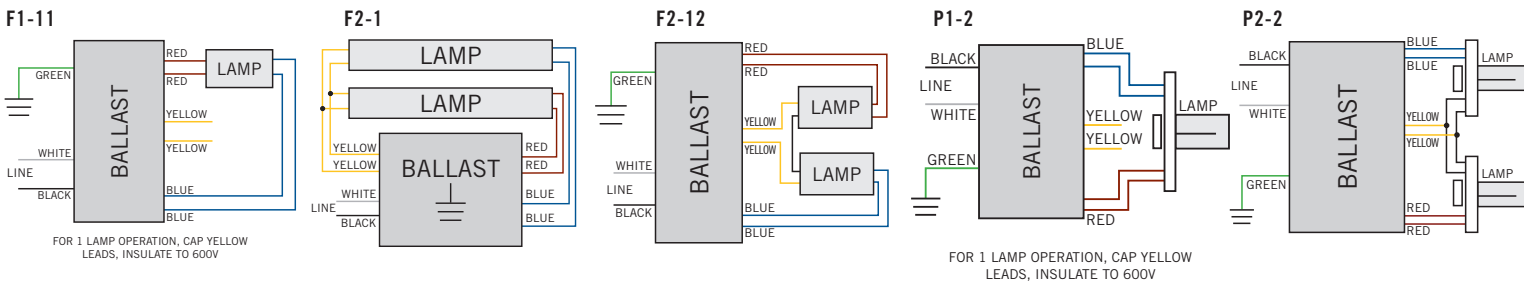




KTEB-224HO-UV-TP-PS /LS

T5HO ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

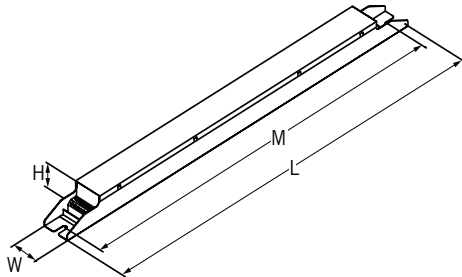

CASE DIMENSIONS


LENGTH: 16.7"
WIDTH: 1.18"
HEIGHT: 1.00"
MOUNTING: 16.4"
UNIT WEIGHT: 0.83 lbs

STANDARD LEAD LENGTHS*

BLACK: 31.00"
WHITE: 31.00"
BLUE: 28.00" X 28.00"
RED: 28.00" X 28.00"
YELLOW: 28.00" X 28.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

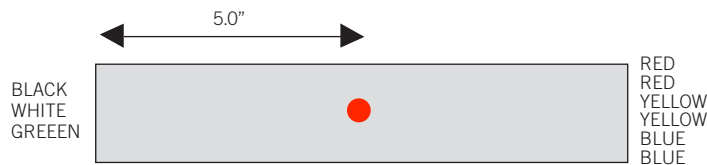

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-224HO-UV-TP-PS/LS-CP	Carton	20	Special Order

CATALOG NUMBER BREAKDOWN

KTEB-224HO-UV-TP-PS/LS

Keystone Technologies Electronic Ballast	2 Lamps	24 Watts	High Output	Universal Voltage Input (120-277V)	Thermally Protected	Program Start	With Leads
---	------------	-------------	----------------	--	------------------------	------------------	---------------